


DI1300


PART LIST




DI Base
(DI1000)



2 - Lithium CR2032
Batteries



Inflation Hose TX/ TF
(DI1020)




Sleeve Venturi
(DI1060)



TX BBS Chuck
(TX9040)

ASSEMBLY INSTRUCTIONS


1. Twist the Sleeve Venturi onto the DI Base using the pretaped screw threads.
2. Twist the Inflation Hose onto the Sleeve Venturi using screw threads.
3. Twist the TX BBS Chuck onto the Inflation hose.

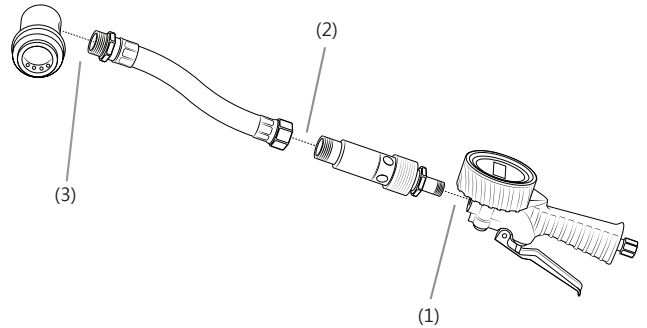

*Tighten all joints with a wrench. Do not over tighten.

PSI GAUGE BATTERY INSTRUCTIONS

1. Use a small screwdriver to unlatch the battery cover.
2. Remove the battery cover.
3. Insert first battery with "+" side up.
4. Insert second battery with "+" side up.
5. Reinstall the battery cover and snap into place.

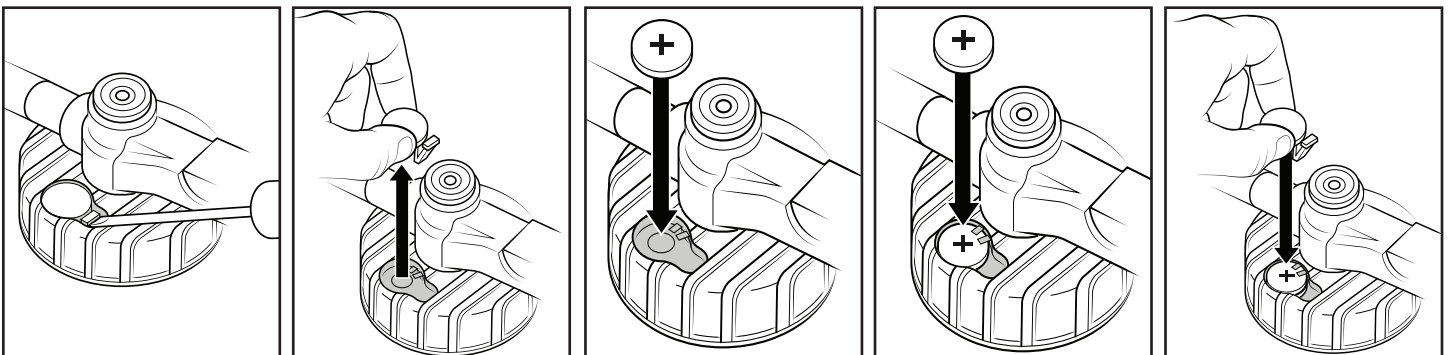

***NOTE** - 2 Lithium CR2032 Batteries are included with purchase. Spare batteries can be purchased at any local or online store.


The Digital Inflator is precalibrated so there's no need to calibrate the gauge before use. If your gauge isn't working properly, you will need to purchase a replacement.

OPERATION INSTRUCTIONS

1. Place a Shippers Products dunnage airbag in the void at least 1 inch above floor. No part of the airbag should protrude beyond the edge of the load.
2. Open the airbag valve cap and snap on the inflator tip.
3. Press the ON button on the digital gauge and make sure that the gauge is set on your measurement of choice. If it is not set on your desired measurement, press and hold the ON/UNIT button until the measurement unit changes. Repeat as necessary until the desired measurement unit is selected. If you need additional lighting to view the numbers, press the LIGHT button.
*Note: light will turn off after 5 minutes of use.

OPERATION INSTRUCTIONS (CONTINUED)

4. Ensure that the Venturi Sleeve is in the open position and squeeze the lever located on the DI Base to begin rapid low pressure inflation. The Venturi openings will draw in ambient air (**refer to Figure A**).
5. When pressurized air begins to flow out of the Venturi openings, close the Venturi Sleeve to begin high pressure inflation cycle (**refer to Figure B**). In order to obtain accurate static air pressure reading, stop the inflation cycle and read the gauge. Repeat as necessary until optimal air pressure is achieved.
6. Once the optimal air pressure is reached, remove inflator tip from the valve.
7. Verify pressure of the airbag no less than 15 minutes after initial inflation.
8. Secure the valve cap.

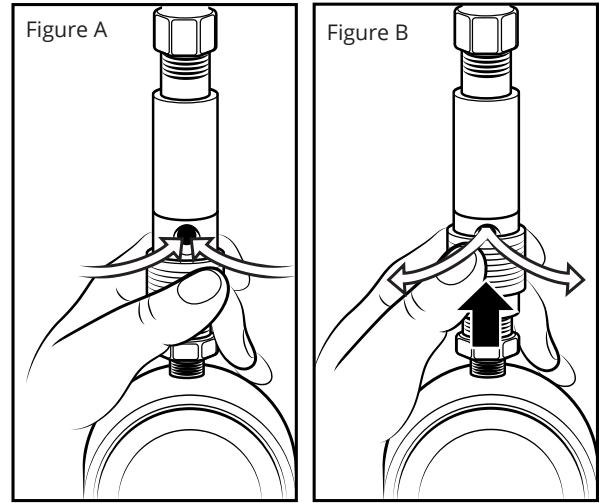

SAFETY & WARNINGS

1. Always wear safety glasses with side shields which conform to ANSI standard Z87.1 or EN166.
2. Never use air source for cleaning.
3. Never exceed maximum operating pressure stated on the airbag.
4. Never point hose towards face or body.
5. Only use unit with Shippers Products airbags.
6. Do not submerge the unit in water.
7. Use a filter and regulator on air line. Do not exceed 80 PSI incoming air line pressure.
8. Store the unit in a dry area. Do not operate or expose unit to wet weather elements.
9. Failure to follow these safety instruction could result in serious injury.

SHIPPERS PROMISE

ONE-YEAR LIMITED REPLACEMENT POLICY

Shippers Products provides a replacement policy for the new product (the "Products") to the original purchaser (the "Purchaser") against defects in material and workmanship for a period of one (1) year from the date of purchase (the "Replacement Period").

This replacement policy is non-transferrable. In the event of a breach of the replacement policy set forth above (the "Replacements"), Shippers Products' sole liability and Purchaser's sole remedy will be for Shippers Products to repair or replace any Product that fails to conform to the Replacement Policy, provided that (i) during the Replacement Policy Period Shippers Products is promptly notified in writing upon discovery of such failure with a detailed explanation of any alleged deficiencies; (ii) is given a reasonable opportunity to investigate all claims; and (iii) SHIPPERS PRODUCTS' examination of such Product confirms the alleged deficiencies and that the deficiencies were not caused by accident, misuse, neglect, improper installment, unauthorized alteration or repair or improper testing. No Products may be returned to SHIPPERS PRODUCTS until inspection and approval by SHIPPERS PRODUCTS. This replacement policy does not cover cosmetic damage (i.e. dents, scratches, and cracks), abuse, or failures due to use of products other than SHIPPERS PRODUCTS dunnage air bags. This replacement policy does not cover the inflation hose assembly, inflation tip, battery or battery charger assembly of the product. EXCEPT AS SET FORTH ABOVE, SHIPPERS PRODUCTS MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, EXPRESS OR IMPLIED (INCLUDING NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE).

SHIPPERS PRODUCTS WILL NOT BE LIABLE, AND PURCHASER WAIVES ALL CLAIMS AGAINST SHIPPERS PRODUCTS, FOR INDIRECT, INCIDENTAL, SPECIAL, PUNITIVE OR CONSEQUENTIAL DAMAGES, DOWN TIME, LOST PROFITS OR COMMERCIAL LOSSES, WHETHER OR NOT BASED UPON SHIPPERS PRODUCTS' NEGLIGENCE OR BREACH OF REPLACEMENT POLICY OR STRICT LIABILITY IN TORT OR ANY OTHER CAUSE OF ACTION. IN NO EVENT WILL SHIPPERS PRODUCTS' LIABILITY IN CONNECTION WITH THE AGREEMENT OR SALE OF SHIPPERS PRODUCTS' PRODUCTS OR SERVICES EXCEED THE PURCHASE PRICE OF THE SPECIFIC PRODUCTS AS TO WHICH THE CLAIM IS MADE.

Please contact the Customer Service Department to claim a replacement policy issue.